


## Eforte Window Profile System


---

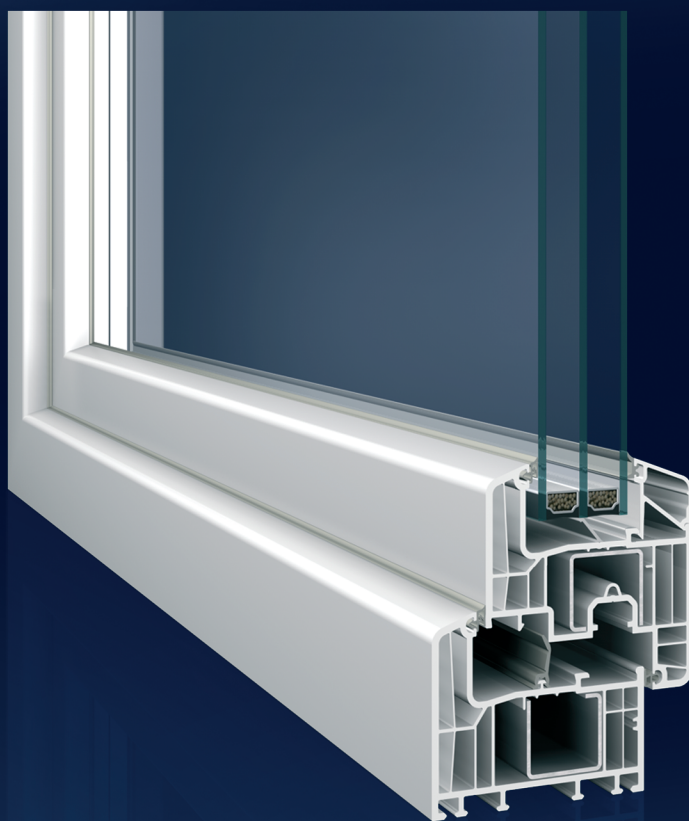


---

Eforte sets new standards for energy efficient window profiles: with a conventional steel reinforcement, a profile depth of 84 mm and without additional insulating elements this profile accomplishes an excellent  $U_f$ -value. Offering a flexible installation for profile complies with all types of building requirements from the passive house standard up to overlap bonding, and is also available in many attractive colours.

---

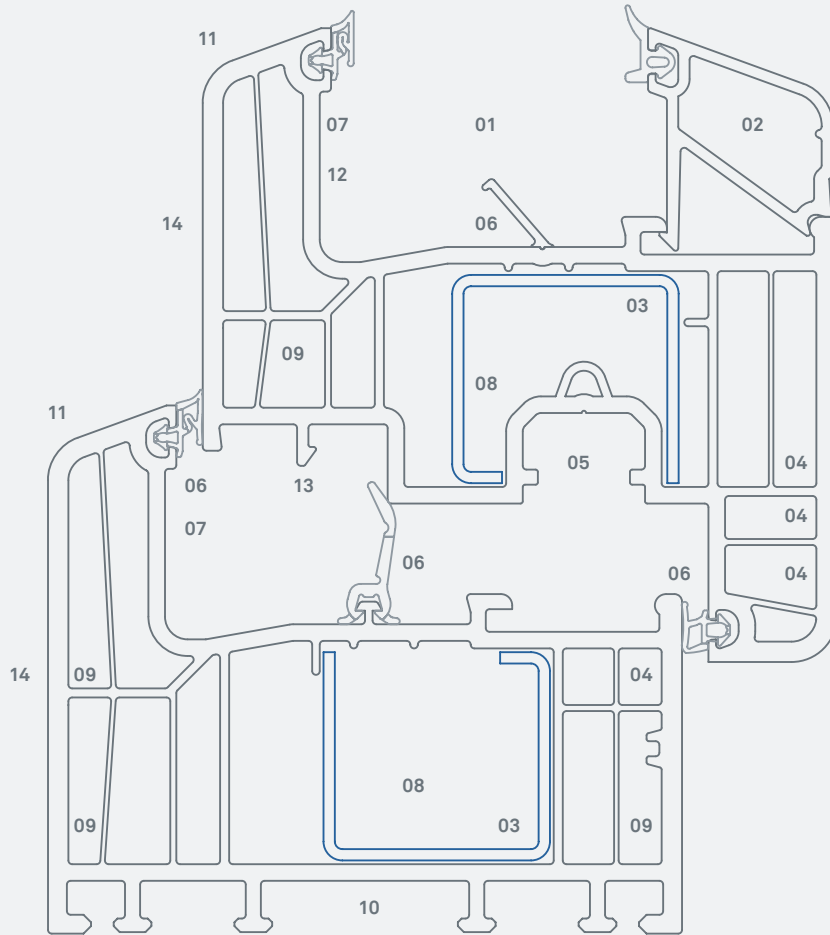

Eforte  
Fig.: 1:1

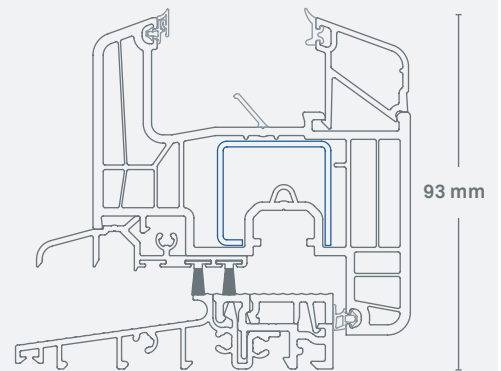

Barrier-free balcony door threshold  
Fig.: 1:2



## INOUTIC IC PLUS

Comfort / Safety



## INOUTIC ECO PLUS

Energy Saving / Quality



## INOUTIC DESIGN PLUS

Colour / Style

- 01 20 to 56 mm glazing:** for very thick thermal insulation or soundproof glazing
- 02 2-foot glazing bead in compliance with DIN 18545:** for enhanced burglary protection
- 03 Strong reinforcements:** stable window design / large chambers for additional insulation options.
- 04 Fittings:** high level of functionality and long service life / mounting through three walls and an additional screw port
- 05 Euro-groove, 13 mm centerline distance:** allows retrofitting to safety windows with high burglary protection

- 06 New additional seal in glazing rebate and three framed seals:** maximum thermal insulation / wind resistance and watertightness
- 07 Glazing rebate height 25 mm:** best thermal insulation / avoids condensation
- 08 6-chamber technology:** excellent thermal insulation with steel /  $U_i$ -value  $0.95 \text{ W/m}^2\text{K}$
- 09 Dowel, draining and ventilation holes through pre-chambers:** moisture and corrosion protection in the steel and reinforcement chambers
- 10 Profile depth 84 mm:** high thermal insulation saves heating costs

- 11 Slender profile with narrow cross-section of 120 mm and 20 degree bevels:** good water run-off / well-balanced design
- 12 Overlap bonding:** floor to ceiling elements of up to 2.60 m are possible / enhanced distortion resistance
- 13 Weather groove:** integrated mounting for false mullion profile
- 14 Design options:** large selection of decors and colours / available in plain colour and wood decors, with pearl-like structure and in metallic look / also optionally with aluminium cladding

INOUTIC PROFILES COMPLY WITH ALL QUALITY AND TESTING STANDARDS. INOUTIC IS A FOUNDER MEMBER OF THE INITIATIVE "PLASTIC WINDOW RECYCLING" REPRESENTING THE LEADING GERMAN PLASTIC PROFILE MANUFACTURERS UNDER THE NAME REWINDO GMBH.

YOUR WINDOW SPECIALIST